

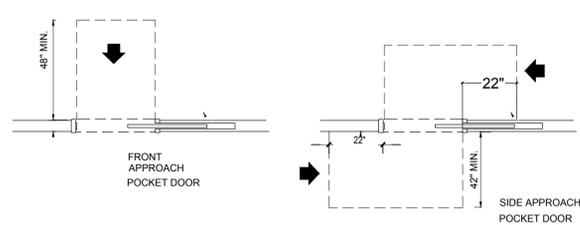
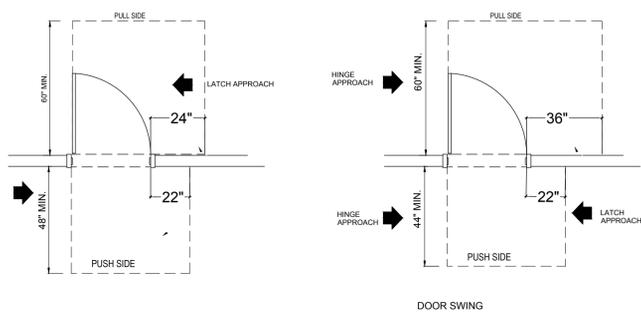
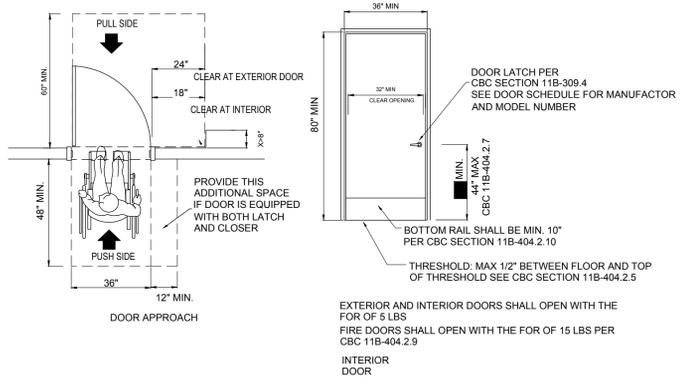
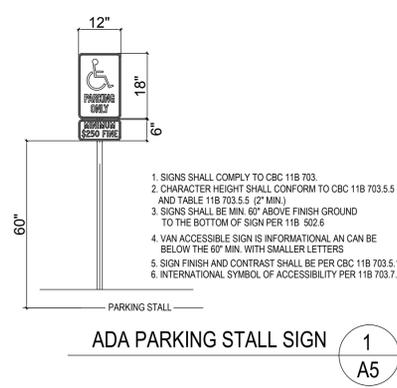
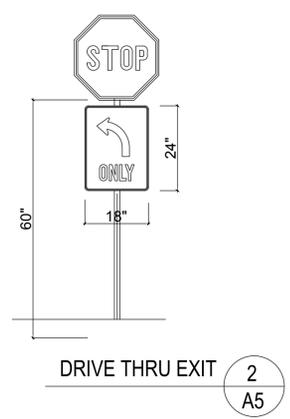


1. METAL ROOF: 22 GAUGE 3" V SHAPE GALVANIZED AND PAINTED WITH MIN 1/4" PER FOOT SLOPE FRONT TO BACK
  2. FASCIA FRAME: 8"x3" L METAL GALVANIZED
  3. METAL POST: HSS 4"x4"x1/8" GALVANIZED
  4. GATES: SLIDING GATES HUNG FROM TOP MIN. 5" WIDE CLEAR OPENING METAL FRAME 3"x3" L METAL PANEL 22 GAUGE 3" V SHAPE
  5. CMU BLOCK 8x6x16 WITH #5 BAR REINFORCNG SOLID GROUT WITH SMOOTH STUCCO FINISH
  6. GATES: 36" WIDE SWING: METAL FRAME WITH V SHAPE METAL PANEL
- METAL FRAME TO MATCH BUILDING WINDOW FRAMES STUCCO TO MATCH BUILDING STUCCO

### TRASH ENCLOSURE



### EGREE DETAILS

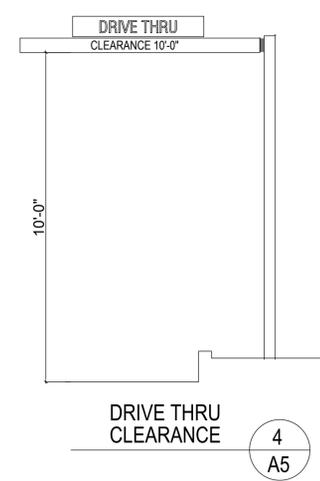

ARCHITECT:  
DAVID YORK, ARCHITECT  
4052 CALLE CAMPANERO  
SAN CLEMENTE, CA 92673  
(949) 887-8034 YORKARCH@YAHOO.COM

OWNER:  
MILTON ECONOMY  
1052 FLAGLER RANCH RD.  
CORONA CA., 92881  
(949) 929-2651

DRIVE THRU RESTAURANT  
4300 GREEN RIVER RD  
CORONA, CA. 92882

TRASH ENCLOSURE  
PATH OF TRAVEL

## EXHIBIT C